


Innovative  
Stylish  
Dynamic

## 泵送系统



PRO-551E

### 粘压特性表

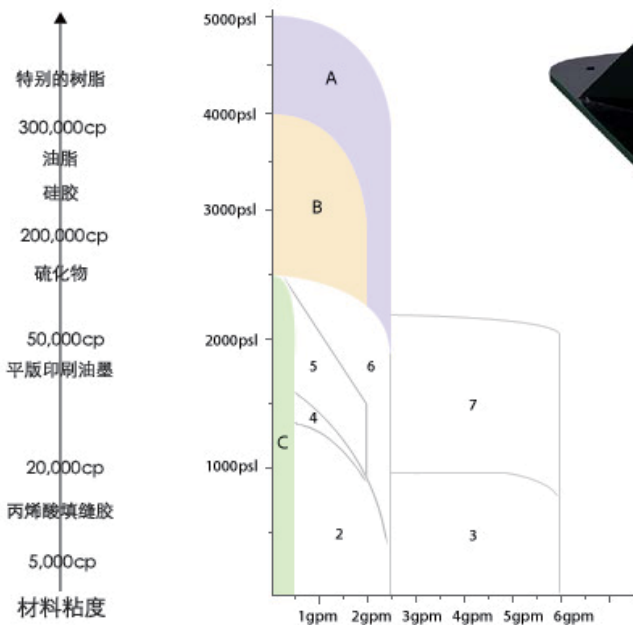

#### 泵的选型

- A PRO-551E
- B PRO-401P
- C PRO-201P

使用一些粘性材料时，您可以选择HASCO：  
硅胶 油脂 密封剂  
粘接剂 其它高粘度涂料



PRO-551P



PRO-201P



PRO-401E



PRO-401P

	PRO-551E/55E000	PRO-551P/55P000	PRO-401E/40E000	PRO-401P/40P000	PRO-201P/20P000
空气马达	45100	55P100		28100-W	
泵体	55E200	55P200	40E200		20P200
升降立柱	55E300	55P300	40E300	40P300	20P300
调压阀	55E400	55P400		20P400	
流体压缩比	55: 1	50:1	40: 1		16: 1
工作循环/分钟	50				60
流量/分钟 (L)	9.46	4.53	6.30		5.44
最大流体压力 (bar)	385	350	280		112
进气压力范围 (bar)	3-7				
行程 (mm)	120			100	
重量 (净重 kg)	249	104	130	94	85
尺寸 (cm)	102×78×158	60×44×143	85×50×136	60×44×125	60×44×125
推荐应用	高粘度流体				
选配	55E300-A-A1 20L	-			

**上海力桥自动化技术有限公司**  
Shanghai Teridge Automation Co.,Ltd.

上海市联航路1505弄号复地浦江中心A1幢410室  
Tel: (+86) 21 3475 6882  
Fax: (+86) 21 3475 6883

**深圳市特瑞吉科技有限公司**  
Shenzhen Teridge Technology Co.,Ltd

深圳市龙华新区大浪浪口华明工业园A栋5楼  
Tel: (+86) 755 2987 0794  
Fax: (+86) 755 2101 6225

